


> AXR900

Excellent printing quality on textile materials
 Excellent resistance to wash and dry cleaning
 Very good resistance to ironing

AXR®900 is a resin ribbon for Corner Edge and Near Edge printers designed for the textile label printing market.


It can also represent a relevant solution for niche resin applications (involving for example sterilization or resistance to some solvents) which are not satisfied by other resin ribbons.

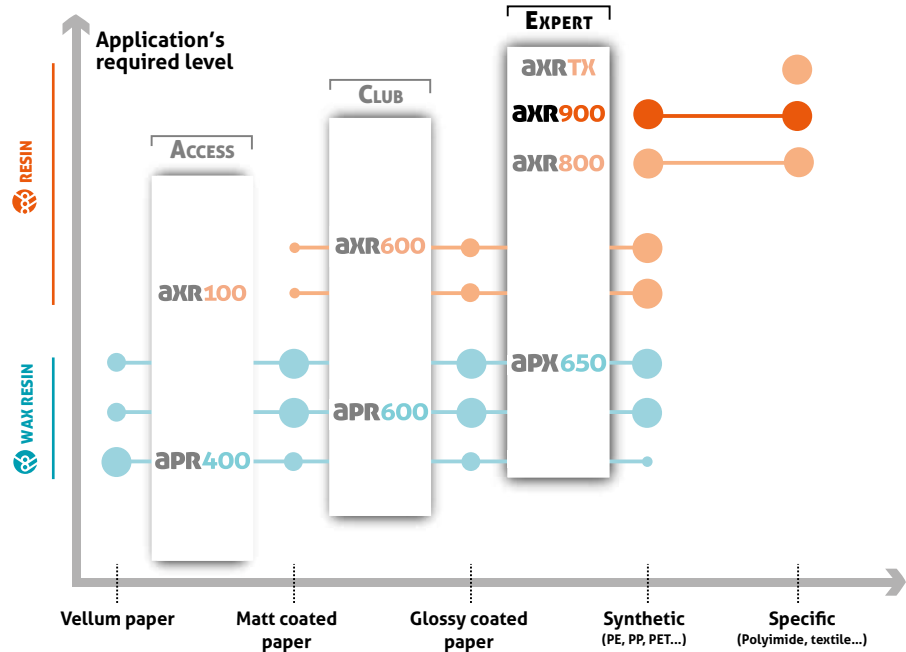


Printing receptor

synthetics	specific
PP ●●●	Cotton ●●●
PE ●●●	Acetate ●●●
PET ●●●	Nylon ●●●
	Satin ●●●

Printer settings

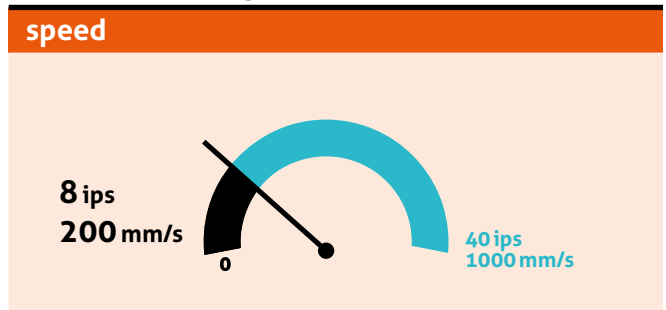

Print resistance

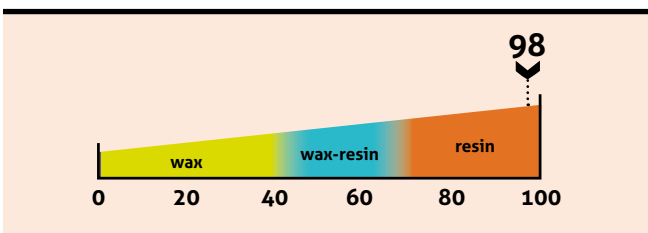

Compliant with the following regulations

REACH / SVHC 1907/2006/EC
Food Contact 1935/2004/EC
Heavy metals 2011/65/EU
California Proposition 65

Your ribbon identity

Colours: ●


Length (m):

Width (mm):

Part number:

Your distributor:

Contact :



axr900

Application fields



Product performance

print quality			
90°Barcode		A _a Small characters	
0°Barcode		2D Barcode	
Logos			
Blackness			
*Optical Density by Reflection, measured using a densitometer.			
technical resistances			
Heat		Light/Blue Wool	>7 gauge"/>
Water/Submerge		Rubbing	
Washing:			

Product physico-chemical features

product structure	
PET film	Thickness: 4,5 µm
Ink	Resin
Melting point	85°C/185°F
Backcoating	Silicon based
Coefficient of Friction	Kd < 0.2
Ribbon thickness	< 8 µm
The ribbon is anti static build-up treated	

Storage

storage conditions

12 months recommended
20-80 % Humidity Rate, 5-35°C (40-95°F)

Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.